
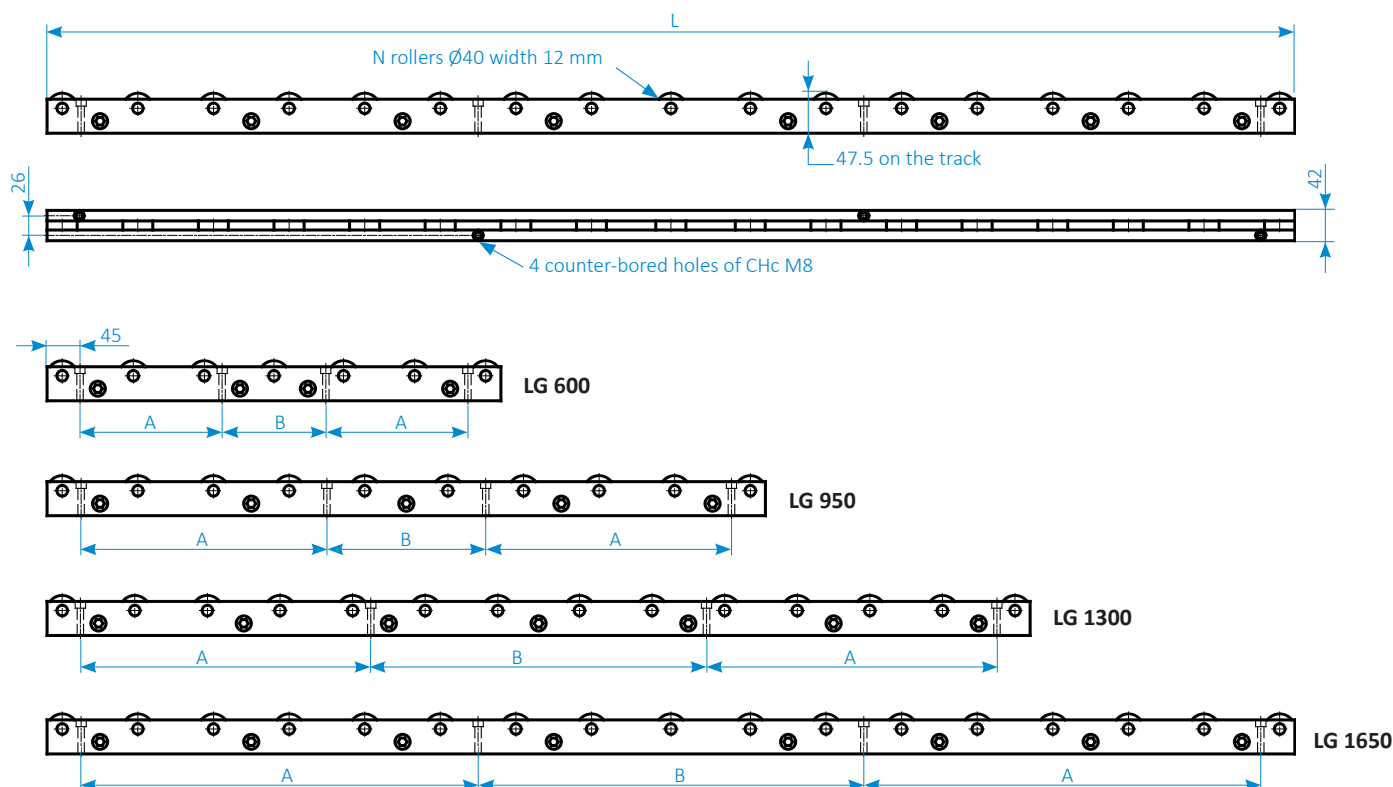


Static roller bar LG

Specifications

- Bars with static rollers (no lifting mechanism)
- Used to create die movement tracks outside the press
- Use as a track for heavy dies
- Use in the die loading or storage systems
- Max. operating temperature 160°C

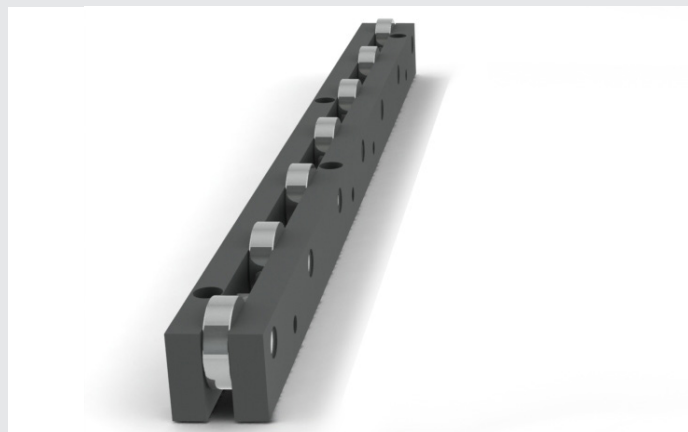

Specifications and dimensions

	LG 600	LG 950	LG 1300	LG 1650
Length (L - mm)	600	950	1300	1650
Capacity (kN)	21	30	42	51
Number of rollers (N)	7	10	14	17
Weight (kg)	6	9,5	13	16
A (mm)	186	325	383	525
B (mm)	138	210	444	510

To calculate the dynamic load for each roller, please refer to sheet 010-00.

Special dimensions and rollers for speeds in excess of 100 mm/sec on request.

All dimensions are in millimeters.

Purchase order reference

LG - length - S
 for special bar lengths (attach a sketch)
 standard or specific in mm

Examples : LG 950 (standard model)
 LG 1000 S (specific model)

SERAPID France
 +33 (0)2 32 06 35 60
 info-fr@serapid.com

SERAPID Deutschland GmbH
 +49 (0)7931 96 47-0
 info-de@serapid.com

SERAPID Ltd
 +44 (0)1359 233335
 info-uk@serapid.com

SERAPID INC.
 +1 586 274 0774
 info-us@serapid.com